

TYPE "D-G" ENDWALL	
PIPE DIAMETER (INCHES)	VOLUME (CU. YDS. CLASS "A") CONCRETE
15	2.44
18	2.57
24	2.85

## GENERAL NOTES

THESE ENDWALLS WILL BE USED ONLY AT LOCATIONS WHERE THEY WILL NOT BE A HAZARD TO VEHICLES THAT RUN OFF THE ROAD. IN NO CASE WILL THE LOCATION OF THESE ENDWALLS BE WITHIN THE CLEAR ZONE.

FOR ALL TYPE "D-G" & "L" ENDWALLS, ALL EDGES OF EXPOSED SURFACES TO BE CHAMFERED APPROXIMATELY ONE INCH.


ALL CONSTRUCTION DIMENSIONS ARE NOMINAL.

IN CONSTRUCTING TYPE "D-G" ENDWALLS, CARE MUST BE TAKEN TO HAVE THE SHORT AXIS OF THE WELL OPENING PARALLEL TO THE LONG AXIS OF THE GRATE IN ORDER TO ALLOW THE BEARING BARS TO PERFORM THEIR FUNCTION PROPERLY.

TYPE "D-G" AND "L" ENDWALLS TO BE CONSTRUCTED OF CLASS "A" CONCRETE OR CEMENT RUBBLE MASONRY.

STEEL GRATING MECHANICALLY LOCKED UNDER HYDRAULIC PRESSURE, WELDED, OR ELECTROFORGED. APPROXIMATE WEIGHT = 45 LBS. THE GRATE SHALL BE GALVANIZED IN ACCORDANCE WITH M.06.03.

## TYPE "D-G" ENDWALL

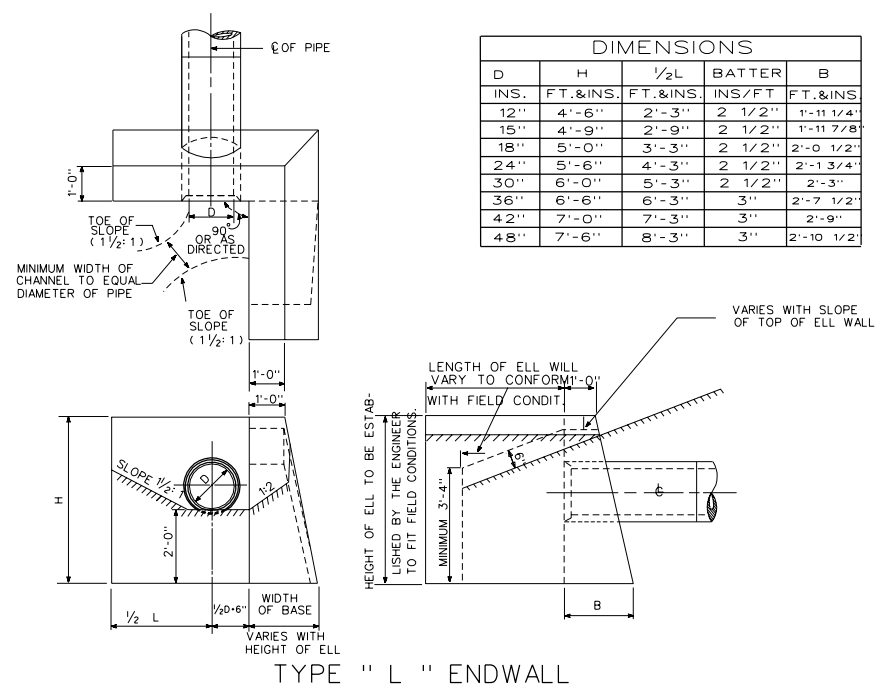

DIMENSIONS				
D	H	1/2L	BATTER	B
INS.	FT. & INS.	FT. & INS.	INS./FT.	FT. & INS.
12"	4'-6"	2'-3"	2 1/2"	1'-11 1/4"
15"	4'-9"	2'-9"	2 1/2"	1'-11 7/8"
18"	5'-0"	3'-3"	2 1/2"	2'-0 1/2"
24"	5'-6"	4'-3"	2 1/2"	2'-1 3/4"
30"	6'-0"	5'-3"	2 1/2"	2'-3"
36"	6'-6"	6'-3"	3"	2'-7 1/2"
42"	7'-0"	7'-3"	3"	2'-9"
48"	7'-6"	8'-3"	3"	2'-10 1/2"

## TYPE "D-G" & "L" ENDWALLS

R. F. FELIX  
N. OZKAN  
T. McMAHON  
J. OBARA  
D. L. COFFEY

8-15-61  
JUNE 1990  
JUNE 1990  
JAN. 1990  
8-26-91

MANUAL REVISIONS TO THIS DOCUMENT ARE PROHIBITED. ALL REVISIONS MUST BE PERFORMED ON  
Cold File: Q5A21200,2001056A.DGN

